

# Game-Day Operation – Cheat Sheet



To download this document and access other training materials scan the QR code with your phone!  
www.tothsports.com/training-materials



## Set-up:

1. Power **ON Scoreboard** and **Video Display** at scoreboard location (if needed)
2. Power **ON Video Rack** in press box  
Power sequence: →
3. Plug-In and Power-up **All Sport 5000**
  - Power cord
  - White 25-pin data cable to black wall plate
4. Plug-in and Power-up **Laptop**
  - Power cord
  - Ethernet cable
5. If using hand-held **RC-200, or MX-1 Device**, verify it has been charged and power **ON**.



## Game Operation:

1. **All Sport 5000** – Controls *BASIC/STANDARD* scoreboard and *DATA* frames on Video Display
  - Verify correct wireless radio settings:  
Broadcast: \_\_\_\_ Channel: \_\_\_\_
  - Verify correct sport insert
  - Enter correct sport code (Soccer: \_\_\_\_\_ Football: \_\_\_\_\_  
Field Hockey: \_\_\_\_\_ Lacrosse: \_\_\_\_\_ )
  - Manual: See Manuals and Training Folder on Desktop
2. **RC-200** - Controls *BASIC/STANDARD* scoreboard *ONLY*
  - Verify correct wireless radio settings: Broadcast: \_\_\_\_ Channel: \_\_\_\_
  - Verify correct sport insert: Clock/Score
  - Enter correct sport code: Clock/Score: 01
  - Manual: See Manuals and Training Folder on Desktop
3. **MX-1 Device** - Controls *BASIC/STANDARD* scoreboard *ONLY*
  - Verify correct MX-1 Device is selected
  - Verify correct wireless radio settings: Broadcast: \_\_\_\_ Channel: \_\_\_\_
  - Verify correct sport mode
  - Manual: See Manuals and Training Folder on Desktop
4. **Laptop** – Controls video display
  - 1) Open Display Studio from Icon on desktop
  - 2) Verify the STATUS indicator at bottom left is green
  - 3) Choose Sport Tab
  - 4) SINGLE CLICK buttons to play desired content

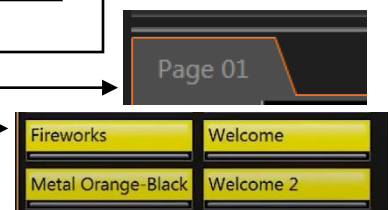

\*Brightness Settings: Click on “Scripts” tab. Choose brightness level.

\*Copy/Paste Buttons: Right-click on button. Click “COPY”.

Choose desired location of button. Click “PASTE”.

## Shut Down:

1. BLANK Video Display from Display Studio Software
2. Power Down: All Sport 5000, RC-200/MX-1, and Laptop
3. Power Down Video Rack (\*Recommended to shut down every 1-2 weeks during season)
  - #1 DMP (Press power button for 1 SECOND then RELEASE. Wait until all lights are off)
  - #2 VIP